




Pitch range	In mm		Nominal dimension range		In mm	
	Over	TO	Over	TO	Over	TO
6	10	30	60	100	150	0.1/10
10	24	30	60	100	150	<
15	30	50	70	100	150	±2°


6. RoHS Compliance

- NOTES1:
UL Standard
1. Rated voltage/current : 300V / 20A
2. Torque value : M4 , 10.53l.b.in
3. Wire range : 22~12AWG
- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 10.0mm, Poles : N=02~24P
3. Withstanding voltage : AC1600V/1Min
4. Operating temperature: -40°C~+105°C
5. Undimensioned tolerances:



PCB LAYOUT

REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

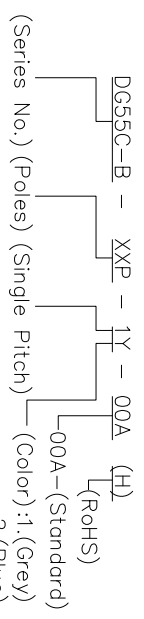

- (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)
2.(Blue)
3.(Black)
4.(Green)
5.(Orange)
6.(Red)
7.(Transparent)
8.(Yellow)
9.(White)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	DG55C-B-XXP-1Y-00A(H)
CHKD:	/	CUSTOMER DRAWING	REV DO
DRFT:	/	DRAWING NO.:	SHEET 1/1
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE 1:1