
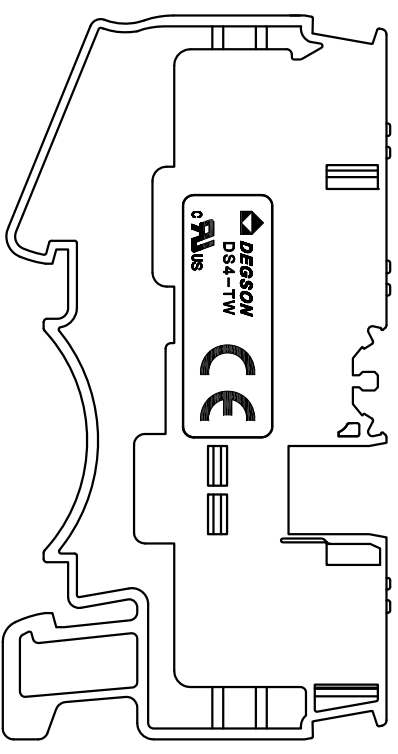

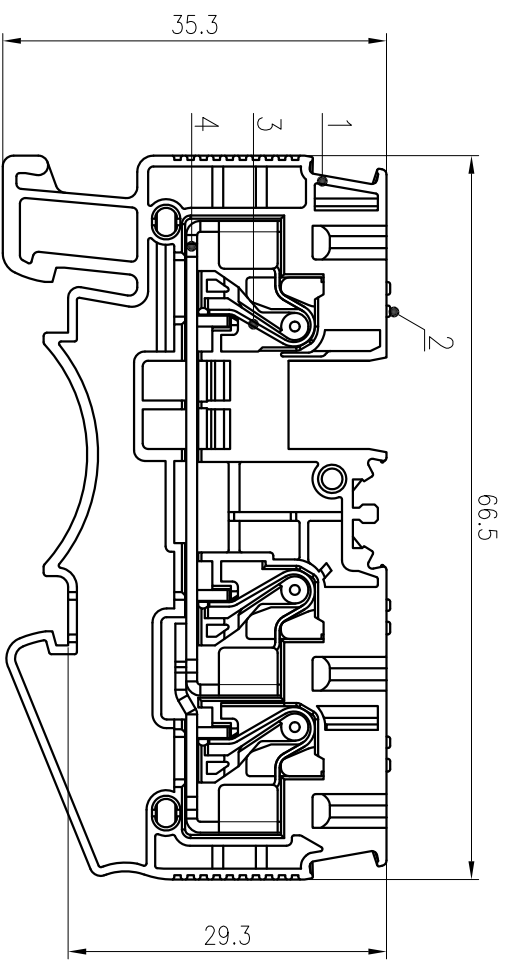


公差/General Tolerances(mm)		0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±2.50	±2.50	±Z



UL 标准/UL Standard:	B	C	D
额定电压/Rated Voltage(V)/Current(A)	600/30	600/30	600/5
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级/Pollution Degree	III/3	/	/
额定电压/电压/Rated Voltage(V)/Current(A)	800/32	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm ² /AWG)	0.2~4,6(SOL)/2~10		
间距/Pitch(mm)	6.2		
剥线长度/Stripping length(mm)	10~12		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS环保要求/Conform to RoHS	Yes		

MATERIAL: /
SURFACE: /

MAT NO.: /
STATUS: /
APPD: LI GL 2020.04.20
CHKD: Mao J 2020.04.20
DRAFT: Liu ZhH 2017.09.09

NAME: **DEGSON** 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

DRAWING NO.: DS4-TW-01P-1Y-00A(H)
DRAFT: Liu ZhH 2017.09.09
TYPE: CUSTOMER DRAWING
SCALE: 1.5:1
REV D0-3
SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES	REV	EQN	DESCRIPTION	DRAFT	DATE
4	Current Carrier	Copper	Sn plated					
3	Spring	Stainless steel						
2	Button	PA66-GF	UL94 V-0					
1	Housing	PA66	UL94 V-0					

D

C

B

A

D

C

B

A