
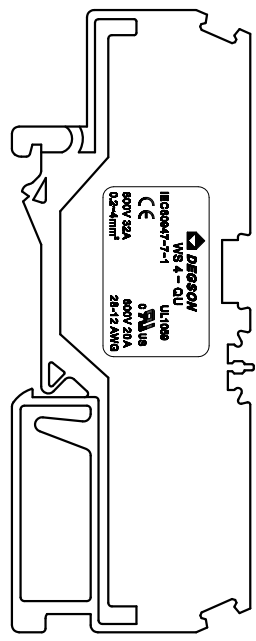

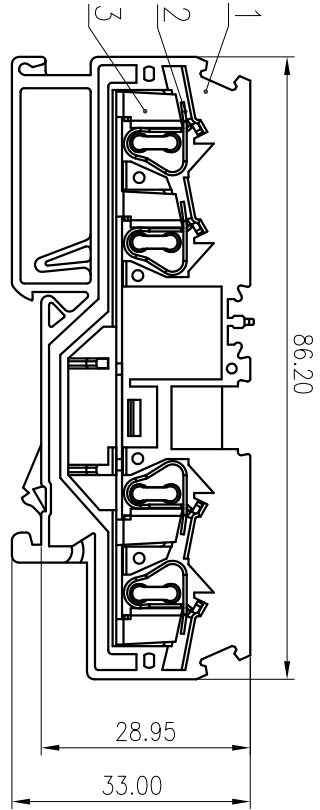


公差/General tolerances(mm)	
0	>3
~	~
3	6
±0.12/±0.18	±0.22/±0.31/±0.37/±0.57/±0.80/±0.93/±1.09/±1.15/±1.60/±2.20/±2.50
0.1/10	~
±0.1	~

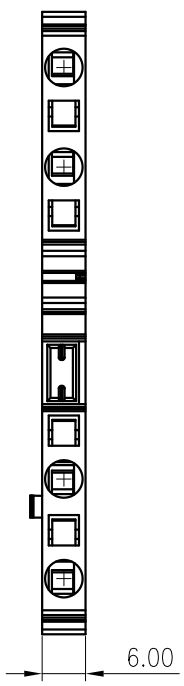

3	Current carrier	Copper	Sn Plated
2	Spring	Stainless steel	
1	Housing	PA66	UL94V-0

ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard:			
额定电压/电流/Rated Voltage(V)/Current(A)		B	C
EC 标准/IEC Standard:		B	C
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3	/
额定电压/电流/Rated Voltage(V)/Current(A)		800/32	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)		8.0	/
导线范围(硬导线/软线)/Wire Range(rigid and flexible)(mm ² /AWG)		0.2~4/28~12(Sol)	

剥线长度/Stripping length(mm)	10-12
使用温度范围/Operating Temperature(°C)	-40~+105
符合RoHS环保要求/Conform to RoHS	Yes
标准颜色编号/Standard color number:	/
PANTONE / RAL	/

MATERIAL: / SURFACE: /

MAT NO.: /

STATUS: /

APPD: Li GL 2020.04.04

CHKD: Mgo J 2020.04.04

DRT:Wang LX 2020.04.04

NAME: WS4-QU-01P-1Y-00A(H)

DRAWING NO.: WS4-QU-C01

REV	EGN	DESCRIPTION	DRT	DATE	SIZE: A4	SCALE: 1:1	SHEET
1							1/1

D

C

B

A

A

B

C

D

D