
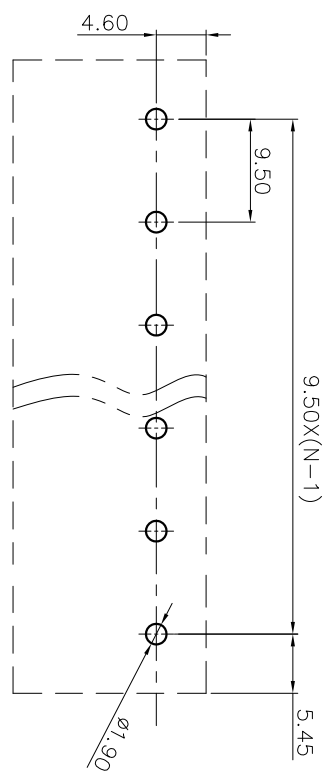
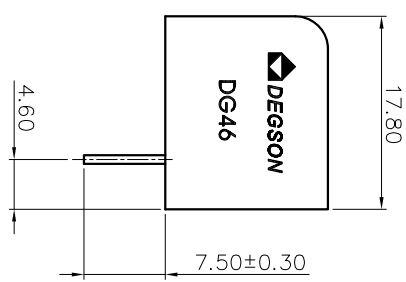
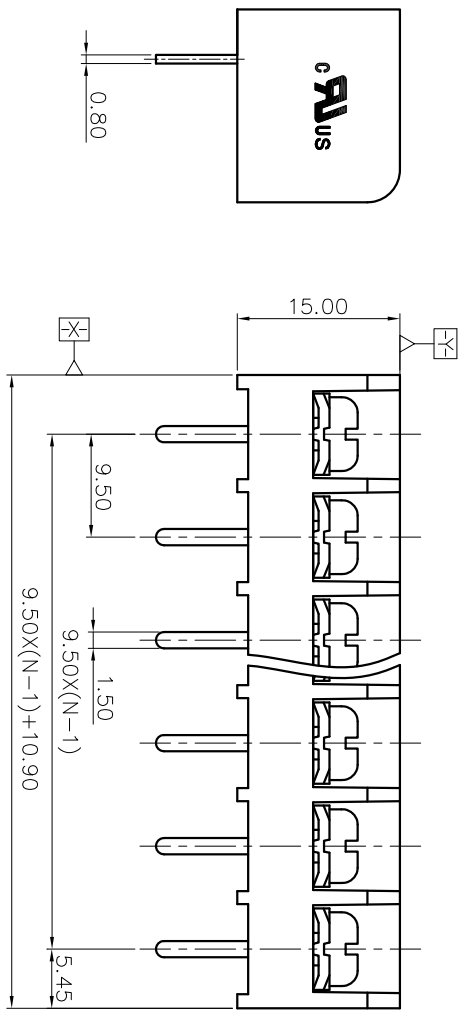


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

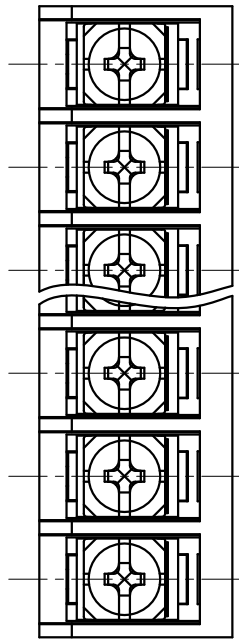

- NOTES1:
- UL Standard
  - 1. Rated voltage/current : 300V / 30A
  - 2. Torque value : M4 , 10.5lb.in
  - 3. Wire range : 22~10AWG

- NOTES2:
- 1. Dimension shall be interpreted per ASME Y14.5-2009
  - 2. Pitch : 9.50mm, Poles : N=02~26P
  - 3. Withstanding voltage : AC1600V/1W/m
  - 4. Operating temperature : -40°C~+105°C
  - 5. Undimensioned tolerances:

Pitch range	Nominal dimension		range		Tolerance
	mm	In	mm	In	
Over	6	10	Over	30	Over
To	10	24	To	60	To
6	10	30	60	100	150
			100	150	±2°

6. RoHS Compliance

DG46S-B- XXP - 1Y - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)  
 2. (Blue)  
 3. (Black)  
 4. (Green)  
 5. (Orange)  
 6. (Red)  
 7. (Transparent)  
 8. (Yellow)  
 9. (White)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	<b>DEGSON</b> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
REV	DO
SHEET	1/1
SCALE	1:1

A 8 7 6 5 4 3 2 1